

08-14.00

A

PATENT APPLICATION
Docket No.: 43605-00019
83 484 a/ea

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re patent application of: Harald THOMAS et al.

For: PARALLEL OPERATION OF DEVICES USING MULTIPLE COMMUNICATION STANDARDS

CERTIFICATE OF MAILING BY EXPRESS MAIL

"EXPRESS MAIL" Mailing Label No. EL524966984US

Date of Deposit: AUGUST 11, 2000
I hereby certify that the paper(s) and/or fee(s) listed below are attached hereto and are being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner of Patents, Washington, D.C. 20231

Type or Print Name: DOROTHY MACKINNON

Dorothy MacKinnon
Signature

BOX PATENT APPLICATION
Assistant Commissioner of Patents
Washington, D.C. 20231

Sir:

PATENT APPLICATION TRANSMITTAL LETTER

Transmitted herewith for filing, please find the following:

1. (XX) The specification of the above-referenced patent application is enclosed herewith (45 page(s) including claim(s) and Abstract).
2. (XX) 14 sheet(s) of:
 informal drawing(s) is (are) enclosed herewith.
 X formal drawing(s) is (are) enclosed herewith.

3. () This application is a:
 Continuation
 Divisional
 Continuation-In-Part
of prior copending parent application

Serial No. _____ filed on _____, now pending.

Please amend the application to insert the following line in the beginning of the specification:

--This application is a Continuation of prior application Serial No. _____ filed on _____, now pending.--

In the event that a petition to extend time under 37 CFR 1.136 is necessary in the parent application to maintain copendency for this application, a petition for an extension of the necessary time to maintain copendency is hereby requested for the parent application and the Commissioner is hereby authorized to debit our Account Number 10-0447 for the necessary fees.

08/11/00
Jc892 U.S. PTO

Jc857 U.S. PTO
09/637543

08/11/00

09/03/00 09/03/00

The fees for this application have been calculated and included as shown below (Prior to calculating the fees, please enter any enclosed preliminary amendment.):

X Checks in the amount of \$1314.00 and \$40.00 are enclosed herewith. Please charge any deficiency or credit any overpayment to Deposit Account No. 10-0447.

— Please charge my Deposit Account No. _____ in the amount of \$_____. Please charge any deficiency or credit any overpayment to Deposit Account No. _____.

An oath or declaration is enclosed herewith that is:

X Newly executed per 37 CFR 1.63(a) and (b).

A copy of the executed declaration filed in the prior application upon which priority is based, showing the signature or an indication thereon that it was signed; and:

_____ This application is being filed fewer than all of the inventors named in the prior application and it is requested that the following name or names be deleted from the list of inventors in the prior application for this continuation or divisional application:

The prior application was accorded status under 37 CFR § 1.47 and is accompanied by:

— A copy of the decision granting a petition to accord Sec. 1.47 status to the prior application (unless all of the inventors have or legal representatives have filed an oath or declaration to join in the prior application).


A copy of the subsequently executed oath(s) or declaration(s) filed by the inventor(s) or legal representative(s) that have subsequently joined in the prior application.

6. (XX) The power of attorney for this application
X is appointed in the newly executed Oath or Declaration submitted herewith.
 _____ is appointed by the power of attorney enclosed herewith.
 _____ remains the same as originally in the parent application.
 _____ was changed during the prosecution of the parent application and a copy of the change in the power of attorney is enclosed herewith.
7. (XX) The correspondence address for this application shall be:
 Richard J. Moura, Esq.
 Jenkins and Gilchrist, P.C.
 3200 Fountain Place
 1445 Ross Ave.
 Dallas, Texas 75202
X which is a new correspondence address or a change therein.
 _____ which is the same as originally in the parent application.
 _____ which is the change in the correspondence address that was filed during the prosecution of the parent application.
8. (XX) Priority is hereby claimed under 35 USC 119 and 172 to the following foreign applications:
- | Country | Serial No. | Date |
|------------|---------------------|------------------------|
| <u>EPO</u> | <u>99 116 576.2</u> | <u>August 24, 1999</u> |
| _____ | _____ | _____ |
| _____ | _____ | _____ |
- and:
 _____ A certified copy of each application is enclosed herewith.
 _____ A certified copy of each application was filed in prior application Serial No. _____.
9. () A verified statement claiming small entity status under 37 CFR 1.9 and 1.27:
 _____ is enclosed herewith.
 _____ was filed in parent application Serial No. _____, and such status remains unchanged and is requested for this application.
10. () A preliminary amendment is enclosed herewith.
11. () An Information Disclosure Statement with Modified PTO Form 1449 and a copy of the cited references are enclosed herewith.
12. (XX) An Assignment of the invention to Telefonaktiebolaget LM Ericsson (publ) with cover sheet and recordation fee is enclosed herewith for recordation by the Assignment Branch.
13. (XX) The Commissioner is hereby authorized to charge payment, or to credit any overpayment, of the following fees associated with this filing or during the pendency of this application to Deposit Account No. 10-0447.
X Any patent application filing fees under 37 CFR 1.16.
X Any patent application processing fees under 37 CFR 1.17.
 _____ The issue fee under 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b).

14. () Other (specify): _____

15. (XX) Confirmation Postcard.

Respectfully submitted,


Richard J. Moura
Reg. No. 34,883

Jenkins & Gilchrist, P.C.
3200 Fountain Place
1445 Ross Avenue
Dallas, Texas 75202-2799
214/855-4709
214/855-4300 (Fax)

[illegible]

*Parallel Operation
of
Devices Using Multiple Communication Standards*

FIELD OF INVENTION

The present invention relates to the parallel operation of multiple devices using multiple communication standards, and in particular to the parallel operation of multiple communication units receiving/transmitting signals at different power levels.

BACKGROUND ART

Smart combinations of different communication units, e.g., cellular mobile phones and Global Positioning System (GPS) receivers are getting more and more important since an increased number of position dependent applications (like route guiding applications, telematics running almost anywhere at any time etc.) are spreading rapidly in the market place.

One such example is a direct sampling receiver for a global positioning system that corresponds to the use of a pair of amplification and comparison units for amplifying an RF-signal received through related antennas in a diversity apparatus for a global positioning system. In the global positioning system one of the switching units is selected in

Fig. 1 shows a schematic diagram for such a multiple standard communication device 100. Typically, the multiple standard communication device comprises at least two subunits 102 and 104 each having a separate antenna 106 and 108, respectively. Examples for such a multiple communication device are the adaption of a GPS receiver unit to a cellular mobile phone unit or the combination of two mobile phone units according to two different standards.

Further, in the sense of the present invention there exists no restriction to any specific combination of two or more subunits as long as a plurality of communication standards are integrated into the multiple standard communication device. Thus, possible combinations could be any pair of subunits adapted to standards taken from a group consisting of GSM900, GSM1800, GSM1900, GPS, AMPS, PDC, CDMA, WCDMA, DAMPS, or positioning system standards GPS, Glonass, EGNOS, WAAS, etc.

As shown in Fig. 1, in a multiple communication device there arises the operation condition that a first subunit 102 adapted to GPS is receiving a signal while a second subunit 104 adapted to GSM is transmitting a signal. Here, in case the first subunit 102 is operating very next to the second subunit 104 the proper operation of both subunits may be prevented since large transmitter output signals from the GSM

unit may degrade the reception performance, e.g., the receiver sensitivity in the GPS unit 102.

In particular this is the case if the transmission signal level at the second subunit 104 and the reception signal level at the first subunit 102 differ significantly. E.g., GPS signals are transmitted via satellites and the reception level is lying several 10 dB below, e.g., the GSM transmission level.

Therefore, to increase the receiver sensitivity there is carried out a reception signal averaging or equivalently correlation in the related subunit 102 to increase reception sensitivity. The longer the time spent for reception signal averaging the higher the sensitivity gain will be.

However, the output of transmission signals by the second subunit 104 - e.g., in a burst mode according to digital TDMA in GSM - may prevent the proper operation of the first subunit 102 since the generation of transmission signals at the antenna 108 with signal levels much higher than the reception signals at the antenna 106 may degrade the reception performance, e.g., the receiver sensitivity at the first transceiver subunit 102.

In the following a more detailed description of problems underlying the present invention will be given with respect to a multiple standard communication device where a second subunit is adapted to the GSM mobile communication standard and a first subunit is a GPS receiver for location specific services.

As will be easily understood by a person skilled in the art the problems discussed are not specific to the GSM/GPS combination but can occur as well in any other multiple standard communication device. Also, the standards underlying the GSM mobile communication system and the GPS localization

system relate to technological background of the present invention and are not described in further detail here.

The GSM system being based on the digital TDMA/FDMA transmission technology is using, e.g., one out of eight time slots for the transmission of signals unless multi-slot operation is activated. Therefore, in case of co-operating of such a GSM transceiver subunit and such a GPS receiver subunit in a multiple standard communication device the GPS receiver subunit sensitivity is degraded by a factor of $1/8$ or equivalently 9 dB during transmission by the GSM transceiver subunit.

This value increases when more than one time slot per frame is used for transmission.

Further, the synchronization of the GPS receiver subunit to the satellite may be lost during a long lasting data or voice transmitter signal outputted by the GSM transceiver subunit.

Still further, it may be difficult to maintain GPS receiver subunit functionality in case of emergency at any time during operation thereof.

In addition, as shown in Fig. 2 illustrating the input/output behaviour of a low noise amplifier increased interfering input signals create undesired mixing signal products and thus degrade the overall noise figure and gain of the low noise amplifier which may no longer be considered as linear device.

A parameter describing the ability to handle increased input signals and shown in Fig. 2 is the 1 dB compression point and defined as the output power level at which the gain drops by 1 dB. Typically, the noise figure and the 1 dB compression point of a low noise amplifier strongly depend on the biasing condition of the amplification element - e.g., a transistor.

Also, it is important to note that a low noise figure found at a low amplification element current usually does not correspond to a high 1 dB compression point and vice versa. This is important for battery powered transceiver subunits where a very low current consumption is needed to achieve a sufficiently long operation/standby time. In other words, this means that the reduction of the amplification element operative current - e.g., the collector current of an amplifying transistor - per se does not lead to an improved blocking behaviour but that further steps are necessary to achieve a satisfying parallel operation of different subunits in a multiple communication device.

In view of the above, further details with respect to the multiple standard communication device adapted to the GSM mobile communication standard and having a GPS receiver for location specific services will now be discussed by way of measurement data shown in Fig. 3 to 5.

A GPS receiver subunit must pick up very weak localization signals from a noise background. Here, the minimum received power in the L1 band for the CA code is about -160 dBW when the space satellite transmitting the signal is at two elevation angles of 5° from the user's horizon and zenith. Between these two elevation angles the minimum received power levels gradually increase up to 2 dB maximum, see Understanding GPS Principles and Applications, E.D. Kaplan, Artech House, 1996.

On the other hand at the same time the GPS receiver subunit is to reject a large number of much stronger unwanted signals. As already outlined above, a low noise amplifier in a GPS receiver subunit must handle interfering transmission bursts generated by the GSM transceiver subunit. The GSM 900 subunit generates a maximum output power in the range of 33

dBm and the maximum output power of the GSM 1800 and 1900 transceiver subunit is 30 dBm.

Further, the actual interfering input power according to the GSM transmission burst signal input at the GPS antenna and supplied to the low noise amplifier of the GPS receiver subunit strongly depends on the relative position of the GPS antenna to the GSM antenna.

The low noise amplifier in the GPS receiver subunit used for the measurements shown in Fig. 3 to 5 uses a transistor of the BFP405 type as amplification element having a noise figure and power gain at different bias operations points at 1.6 GHz as listed in the following table:

I_c [mA]	$ S_{21} * S_{21} $ [dB] (Power gain)	Fmin [dB] (Noise figure)
(VCE=1V, f=1,6 GHz)		
1.0	10.7	0.97
1.5	13.5	0.97
2.0	15.3	1.01
2.5	16.7	1.07
3.0	17.7	1.13
4.0	19.0	1.22
5.0	19.9	1.33
6.0	20.6	1.42
8.0	21.3	1.58
10.0	21.8	1.72

The impact of different bias operation points or equivalently of different collector currents I_c on the overall GPS receiver subunit will be discussed in the following.

Fig.3 shows a low noise amplifier gain versus input signal representation in the presence of an interfering signal at 900 MHz for a low noise amplifier used in the GPS receiver

subunit. From Fig. 3 it may be seen that a low noise amplifier gain compression starts at interferer levels in the range of -30dBm to -25dBm, depending on the collector current I_c .

Further Fig. 4 shows a noise figure of the low noise amplifier in the GPS receiver subunit in the presence of an interfering signal at 900 MHz. As shown in Fig. 4 the noise figure of the low noise amplifier deteriorates with increasing interferer level according to approximately the same rate for each collector current I_c 1.5mA, 2.5mA, and 4mA, respectively.

Further, Fig. 4 shows a moderate increase in noise figure for interference levels up to -20 dBm and an increased interference level according to a factor of approximately 3 for an interference level of -10 dBm. While the illustrated results have been captured at 900 MHz the same results are to be expected for interfering signals at 1800 MHz and 1900 MHz, respectively.

Further, Fig. 5 shows the impact of a variation of noise figure and gain of the low noise amplifier of the GPS receiver subunit on the total noise figure and gain of the GPS receiver subunit. Here, the assumptions underlying the calculation of the overall noise figure are as follows: $G=39$ dB, $NF=3$ dB for the filter of the bandpass type, $G=39$ dB, $NF=7$ dB for the amplifier and mixer gain, and gain and noise figures are assumed to be constant.

As shown in Fig. 5 the overall noise figure of the GPS receiver subunit increases generally with decreasing gain of the low noise amplifier comprised therein and with an increasing noise figure of the low noise amplifier of the GPS receiver subunit itself. Thus, to optimize performance at the GPS receiver subunit it would be necessary to maximize the

gain of the low noise amplifier and minimize the related noise figure.

Heretofore it has been proposed to employ, e.g., means for filtering at the input of the low noise amplifier of the GPS receiver subunit in order to reject strong out-of-band input signals to the low noise amplifier and thus to reduce gain compression. Another option would be to increase the collector current I_c of the transistor realizing the amplification element of the low noise amplifier. However, additional filtering in front of the low noise amplifier increases the overall noise figure of the GPS receiver subunit due to the losses in the filter. Further, collector currents kept on constantly high levels are not desirable for battery powered transceiver subunits due to the decreased operation time.

While in the above a specific configuration with respect to a GPS/GSM multiple standard communication device has been described it is to be understood that any other combination where signal levels for transmission/receptions levels differ significantly between different subunits in a multiple standard communication device lead to identical technical difficulties and performance degradations.

SUMMARY OF INVENTION

In view of the above, the problem of the invention is to maintain a first receiving sub-system in a multiple standard communication device fully operational for all operation modes of a second transmitting sub-system in the multiple communication standard device.

According to the present invention this object is achieved through a multiple standard communication device having the features of claim 1.

Thus, according to the present invention it is proposed to implement at least one of the subunits in the multiple standard communication device such that the operation mode thereof may be modified and switched in dependence of the transmission operation mode of the at least one other subunit in the multiple standard communication device.

Therefore, the present invention solves problems with respect to limited receiver performance in a first subunit during transmission of signals by a second subunit.

In particular a first receiving mode of the first subunit is dedicated to an optimum noise performance of that first subunit and a related low current consumption whereas a second receiving mode is used to increase blocking performance in case the second subunit generates transmission signals with signal levels much higher than the signal levels to be expected at the first subunit antenna.

According to a preferred embodiment of the present invention the first subunit comprises an operation mode modification unit to receive at least one signal specifying time, frequency and/or output level of the second transceiver for operation mode modification in the first subunit.

According to yet another preferred embodiment of the present invention the operation mode modification unit is adapted to modify the input characteristic of the first subunit for operation mode modification in the first subunit, preferably through modification of a low noise amplifier having at least two operation modes and/or a tunable filter and/or a switchable receiver and/or an antenna with tunable gain.

Therefore taking either approach for the modification of the operation mode in the first subunit it is possible to enhance

the overall blocking performance at the first subunit when the second subunit is outputting transmitting signals.

According to a preferred embodiment of the present invention different operation modes in the first subunit are realized using the low noise amplifier that comprises a switchable bias network adapted to define at least two biasing conditions of the low noise amplifier and a switchable matching network adapted to optimize noise performance, gain and stability of the low noise amplifier for the at least two biasing conditions. A first biasing condition is related to a normal operation mode to optimize noise performance and achieve low current consumption in the first subunit when no transmit bursts are generated by the second subunit. Further, a second biasing condition is related to a gain adjustment mode to improve blocking performance when transmit bursts are generated by the second subunit. Preferably, the switchable matching network is adapted to define the at least two biasing conditions for an transistor realizing an amplification element of the low noise amplifier.

Therefore, according to this preferred embodiment it is possible to achieve low current and optimum noise performance when the second subunit is not generating transmission signals, e.g., transmission bursts according to the TDMA transmission scheme, or in other words to achieve best reception performance at the first subunit.

Thus, the first subunit remains fully operational when the second subunit is transmitting signals and the related low noise amplifier gain in the first subunit is not degraded significantly.

Overall the noise performance of the low noise amplifier in the first subunit is optimized for at least two bias operation points thereof and a cost effective solution may be

achieved since no additional filter structures in front of the low noise amplifier are needed.

According to a preferred embodiment the operation mode modification unit employs at least one signal to activate the transmission operation mode in the second subunit.

Also, control and/or input signals defining the transmitter signal in the second subunit are employed to activate the gain adjustment mode in the first subunit during parallel operation of both subunits in the multiple standard communication device.

Therefore, according to the present invention signals being available anyway during the operation of the multiple standard communication device are used to set the different operation modes in the first subunit. Thus additional measures to identify different operation modes and optimize related settings in the multiple standard communication device are minimized.

According to yet another preferred embodiment of the present invention the switchable receiver comprises a first low noise amplifier being directly connected to an antenna adapted to receive a signal for localization, and to amplify the signal for localization, a second low noise amplifier adapted to amplify the signal for localization, and a filter connected between the antenna and the second low noise amplifier and adapted to reject blocking signals. In case the performance of the first low noise amplifier is limited to an interfering signal the second low noise amplifier with the filter connected thereto is activated.

Therefore, according to this preferred embodiment no tunable filters are required with the receiver architecture having two different low noise amplifiers. Here, a first low noise amplifier is connected directly to an antenna whereas a

20070303 11:00:00

second low noise amplifier is connected through a filter to an antenna. Whenever performance of the directly connected low noise amplifier is restricted during transmission of a signal by the second subunit the second low noise amplifier having the blocking filter at its input terminal is activated in order to maintain adequate reception quality.

According to yet another preferred embodiment of the present invention the antenna characteristics of the subunit are adapted to enhance blocking performance of the first subunit for shifting the frequency with maximum gain in case of presence of a transmission signal outputted by the second subunit.

This tuning allows to provide additional attenuation for out of band signals in a simple and cost efficient manner. Also, it may either be used as a single measure or in combination with the preferred embodiments of the present invention outlined above.

BRIEF DESCRIPTION OF DRAWINGS

In the following preferred embodiments of the present invention will be described with reference to the drawing in which

Fig. 1 shows a schematic diagram for a multiple standard communication device according to the background art of the present invention;

Fig.2 shows the amplification characteristics of a low noise amplifier and the impact of an interfering input signal therefor;

- Fig. 3 shows a amplifier gain versus input signal representation in the presence of an interfering signal for a low noise amplifier that may, e.g., be used in a position system GPS receiver subunit;
- Fig. 4 shows a noise figure of the low noise amplifier in the GPS receiver subunit in the presence of an interfering signal;
- Fig. 5 shows the impact of a variation of noise figure and gain of the low noise amplifier of the GPS receiver subunit on the total noise figure and gain of the GPS receiver subunit;
- Fig. 6 shows a basic schematic diagram at first elements of each subunit in the multiple communication device;
- Fig. 7 shows a schematic diagram of a multiple standard communication device according to the present invention;
- Fig. 8 shows a schematic diagram of a low noise amplifier having a tunable matching network and an operating point setting network according to the present invention;
- Fig. 9 shows a schematic diagram of a matching network to be used in the low noise amplifier shown in Fig. 8;
- Fig. 10 shows a schematic diagram of the low noise amplifier including the matching network shown in Fig. 9;
- Fig. 11 shows a schematic diagram of a tunable filter provided between the antenna and the low noise amplifier of the first subunit;
- Fig. 12 shows a schematic diagram of a switchable receiver;

Fig. 13 shows an adaptation of antenna characteristics to enhance out of band blocking performance; and

Fig. 14 shows an illustration of a GPS/GSM multiple communication device according to the present invention.

DESCRIPTION OF PREFERRED EMBODIMENTS

As outlined above, the different embodiments of multiple standard communication device 10 according to the present invention shown in Fig. 7 and to be described in the following aim at keeping a first, at least receiving subunit 12 of the multiple communication device 10 fully operational for all operation modes of a second, at least transmitting subunit 14 of the multiple communication device.

Fig. 6 shows an example of a basic schematic diagram for each subunit in the multiple standard communication device 10 handling transmitter/receiver signals between an antenna and an intermediate IF stage.

As shown in Fig. 6, each subunit comprises the antenna 16, a low noise amplifier 18, a filter 20 and an amplifier/mixer 22. While in Fig. 6 the low noise filter is shown connected to the input of the filter 20 the sequence may as well be reversed.

The different embodiments of the present invention make use of the fact that the overall receiver performance in each sub-system and also the related receiver sensitivity is mainly determined by the performance contributions - e.g., noise figures - of the very first stages in the subunit.

In particular, the noise figure of the low noise amplifier shown in Fig. 6 is one of the main factors for the overall noise figure of the overall subunit in case no pre-filtering is carried out in front of the low noise amplifier.

This may be seen from an analysis of the overall noise figure of each subunit taking into account the cascaded structure thereof and the following parameters:

Fi	Noise figure of stage i;
Gi	Gain factor of stage i;
Li	Stage loss of stage (1/GI);
T	Device temperature in K;
T0	Room temperature defined to 290 K;
T[K]	T[C°] + 273,15 K;
Fi[dB]	10*log(Fi); and
Gi[dB]	10*log(Gi).

Using the following formula

$$\begin{aligned}
 F = & F_1 + (F_2 - 1)/G_1 + (F_3 - 1)/(G_1 * G_2) + \\
 & (F_4 - 1)/(G_1 * G_2 * G_3) + \dots = \\
 = & 1 + \text{sum}(i=1 \text{ to } n) \{ F_{i-1} / \text{mul}(j=1 \text{ to } n-1) (G_i) \}
 \end{aligned}$$

for the calculation of the cascaded noise figure the following results are obtained for the different stages of the subunit shown in Fig. 6:

Comment	Gain[dB]	Noise figure[dB]
Low noise amplifier	8.0	2.5 (variable)
Filter	-3.0	3.0 (fixed)
Amplifier & mixer	39.0	7.0 (fixed)
Overall gain [dB]= 44.0		
Overall noise figure [dB]= 5.06		

Also the formula given above allows to compare a case A where no interfering signal from the transmitting subunit 14 is

received at the receiving subunit 12 in comparison to a case B where such an interfering signal is received the receiving subunit 12:

Comment	Case A	Case B	Difference A-B
Low noise amplifier	G[dB] = 12.0	G[dB] = 8.0	4.0
	NF[dB] = 2.5	NF[dB] = 2.5	0.0
Transceiver subunit	G[dB] = 48.0	G[dB] = 44.0	4.0
	NF[dB] = 3.7	NF[dB] = 5.1	1.4

In evaluating the differences of, e.g., several dB between case A and B for the gain G and the noise figure NF it is important to note that for many application - e.g., the use of GPS localization information in a GSM mobile phone - the received signal level at the first subunit - e.g., adapted to the GPS system standard- is already some several 10 dB below the transmitter signal level of the transmitting second subunit 14 - e.g., adapted to the GSM standard. In conclusion, a further reduction of the received signal level at the first subunit 12 may render this subunit fully in-operational.

In the following, there will be described a multiple standard communication device 24 according to the present invention. This multiple standard communication device 24 comprises a first subunit 12 receiving input signals via a first antenna 28 at a predetermined input level. Further, a second subunit 14 transmits output signals via a second antenna 32 at a specific time, frequency and output level. Here, the output level of the second subunit 14 is very large compared to the input level of the first subunit 12.

To avoid the interference of transmission signals of the second subunit 14 at the first subunit 12, according to the present invention it is proposed to modify the operation mode of the first subunit 12 when the second subunit 14 is transmitting output signals.

Heretofore, the first subunit 12 comprises operation mode modification unit 34 to receive at least one signal from the second subunit 14 specifying time, frequency and/or output level in the second subunit 14. This one signal may then be used for operation mode modifications in the first subunit 12. In particular, the operation mode modification unit 34 is adapted to modify the input characteristic of the first subunit 12.

As further shown in Fig. 7, the operation mode modification unit 34 is particularly adapted to modify at least the input characteristics of a low noise amplifier 36 in the first subunit 12 which has at least two operation modes. Also, the operation mode modification unit may equivalently amend a tunable filter 38 and/or further a switchable receiver 70. Still further, the operation mode modification means may as well be adapted to tune the antenna 28 which may have a variable gain.

The operation mode modification unit 34 shown in Fig. 7 minimizes the impact of gain compression of the overall noise figure of the first subunit 12 - e.g., a GPS receiver - by strong interfering signals from the second subunit 14 - e.g., a GSM mobile phone - are present at the low noise amplifier input of the first subunit 12 by adjusting the gain of this lower noise amplifier. Here, gain adjustment or equivalently an increased gain occurs every time a strong interfering signal from the second subunit 14 is present at the low noise amplifier of the first subunit 12. This is the case when transmission bursts with high output power are generated in the second subunit 14.

To the contrary, transmission bursts having low output power do not lead to a significant increase in compression and therefore no operation mode amendment is carried out by the operation mode modification unit 34 in this case. Typically,

a threshold activating gain adjustment is determined through the design of the first antenna 28 and the second antenna 32, further the low noise amplifier - in particular, the collector current of the amplifying transistor comprised therein, and the type of transmission bursts, i.e. the related frequency and output level.

Fig. 8 shows the basic structure of the low noise amplifier 36 enabling an operation mode modification.

As shown in Fig. 8, the low noise amplifier 36 comprises a switchable bias network 40 adapted to define at least two biasing conditions of the amplification element or equivalently the amplifying transistor 42 in the low noise amplifier. In addition, the low noise amplifier 36 comprises a switchable matching network 44 adapted to optimize noise performance, gain and stability of the low noise amplifier at the different bias conditions determined by the switchable bias network 40.

Also, there may be provided an additional matching network 46 at the output side for improved matching of the low noise amplifier 36 to the subsequent filter 38, i.e. the input impedance thereof. Additional resistors 48 and 50 are provided to further determine the operation point of the amplifying transistor 42. Also, a capacitor 52 is provided as decoupling capacitor achieving a short circuit of RF frequencies at the output side.

The low noise amplifier shown in Fig. 8 is operated with at least two biasing conditions. Here, a first biasing condition is related to a normal operation mode to optimize noise performance and achieve low current consumption in the first subunit 12 when no transmit bursts are generated by the second subunit 14. Also, a second biasing condition is related to a gain adjustment mode to improve blocking

performance when transmit bursts are generated by the second subunit 14.

Therefore, one option to modify the operation mode is to change the bias operation point in the switchable bias network 40 for the amplifying transistor 42. Of course, this has an impact on the noise figure of the lower noise amplifier 36 since the S-parameter of the amplifying transistor 42 changes with changing collector current and hence the matching network 44 adapted for optimal noise can be changed as well. In other words, the matching network 44 and optionally the matching network 46 provided for optimum noise performance, gain and stability according to the present invention are switchable to provide well defined operative conditions for the at least two different biasing conditions outlined above.

According to the present invention the operation mode modification means 34 shown in Fig. 7 employs at least one signal received from the second subunit 14 to activate the normal operation mode of the lower noise amplifier 36 in the first subunit 12. This at least one signal is selected from a group comprising:

- at least a signal indicating receiver operation in the second subunit 14;
- a signal to select frequency band and mode for reception in the second subunit 14;
- at least one signal containing base band information of the received signal at the second subunit 14;
- at least one signal being used to set a specific divider ratio for reception at the second subunit 14; and
- at least one positioning system S/N measurement signal indicating a decreased S/N ratio and thus

the transmitting operation of the second subunit 14.

Alternatively, the second gain adjustment mode in the low noise amplifier 36 of the first subunit 12 may be defined according to control and/or input signals defined in the transmitter signal of the second subunit 14. Here, the at least one control signal is selected from a group comprising:

- a control signal indicating transmitter operation in the second subunit 14;
- a control signal to activate the antenna switch in the transmitter of the second subunit 14;
- a control signal to select frequency band or mode in the second subunit 14;
- a control signal to set ramping up and power level of a power amplifier in the second subunit 14; and
- control signals that are used to set a transmitter specific divider ratio.

Still further, the at least one input signal to set the gain adjustment mode in the first subunit 12 is selected from a group comprising:

- input signals containing base band information for transmission through the second subunit 14;
- a local oscillator input signal in a transmit/receive chain of the second subunit 14;
- transceiver transmitter signals detected by an RF-detector, e.g., attached in the surrounding of the second antenna 32;
- interfering RF-signals received by the antenna 28 of the first subunit 12 and detected through a further detector (not shown in Fig. 7).

As shown in Fig. 7, each of the different signals, i.e. at least one signal to actuate the normal operation mode of the

gain adjustment mode in the first subunit 12 is transferred from the second subunit 14 by a connection between the second subunit 14 and the first subunit 12, in particular the second subunit 14 and the operation mode modification unit 34.

In the following, a more detailed explanation of the matching network to be used in the low noise amplifier shown in Fig. 8 will be given with respect to Fig. 9.

The matching network shown in Fig. 9 serves to achieve optimum noise matching, i.e. to provide a resistance according to the overall system impedance, e.g., 50 Ω , at its input terminal. Heretofore, it is necessary to derive a device model that has an input impedance equivalent to the complex conjugate Z_{opt}^* of the optimum noise impedance Z_{opt} . Since the design of impedance matching network is well known in the art, no further details will be explained here, but reference is made, e.g., to microwave field effect transistor - Theory, Design and Application; R.S. Pengelly; Electronic Devices and Systems Research Studies; 1982; ISBN 0471 102083, pp. 163. Typical examples for the matching network 44 at the amplification transistor 42 input terminals for an amplifying bipolar transistor of the BFP405 type for

```

Zo =      System Impedance == 50 Ohm;
Gopt =    Source reflection coefficient for minimum noise
          figure;
f =       1.8 GHz;
VCE =     1 V;

```

are as follows:

Input reflection coefficient transistor

BFP405 as a function of collector current

Matching network

IC	Fmin[]	Gopt_mag[]	Gopt_ang [deg]	C1 [pF]	L1 [nH]
mA					

1.0	1.15	0.56	32	1.33	7.00
2.5	1.20	0.41	25	1.77	7.46
5.0	1.43	0.28	17	2.33	8.47

Fig. 10 shows a further detailed schematic diagram of the low noise amplifier 36 of the first subunit 12 shown in Fig. 7 comprising the matching network shown in Fig. 9.

In particular, the matching network shown in Fig. 9 is inserted for the matching network 44 and 46 shown in Fig. 8. While the matching network 46 at the output side shown in Fig. 8 is implemented also using the matching network shown in Fig. 9, different reference numerals have been assigned to the related capacitor and inductor, since the capacitance and inductance for the matching network 44 at the input side and the matching network 46 at the output side according to the present invention must not be identical. Also, a further decoupling capacitor 46 is provided between the input matching network 44 and the variable biasing transistor 40 so as to achieve a short circuit of RF components.

Operatively, in the low noise amplifier shown in Fig. 10 the RF input signal from the antenna is passed over the input matching network 44 to achieve optimal noise matching. Further, the signal occurring at the output of the input matching network 44 is then passed over the capacitor 62 short-circuiting radio frequencies and it then controls the amplifying transistor 42. Further, the biaspoint settings are defined by the values of the resistors 40, 48 and 50.

However, it should be noted that the present invention is not restricted to this biaspoint setting but that otherwise point setting schemes may easily be found, e.g., in: U. Tietze, Ch.

Schenk: Halbleiter-Schaltungstechnik; Springer Verlag; ISBN 3-540-16720-X, pp. 49: "4.3.5 Arbeitspunkteinstellung". As shown in Fig. 8 above, the biaspoint can be made variable by using tunable resistors. For example, resistor 40 may be split into two resistors 40-1 and 40-2. Resistor 40-2 may then be short-circuited by a switch such that in case the switch is closed the total value of resistor 40 takes a smaller value when being compared to the state when the switch connected across the resistor 40-2 is kept open.

Further, in the low noise amplifier circuit shown in Fig. 10 the collector current I_c may easily be controlled through change of the supply voltage V_{dc} . Here, typical values are $I_c = 1.5 \text{ mA}$ at $V_{bat} = V_{dc} = 3.4 \text{ V}$, $I_c = 2.5 \text{ mA}$ at $V_{bat} = V_{dc} = 5 \text{ V}$, and $I_c = 4.5 \text{ mA}$ at $V_{bat} = V_{dc} = 8.2 \text{ V}$.

While in the above the operative modes of the low noise amplifier according to the present invention has been considered, another aspect is the exact time of switching of the input characteristics of the low noise amplifier. In particular, in case the first subunit 12 receives a localization signal such as a GPS-signal, it should be considered that the localization information is comprised in the phase of the reception signal. Therefore, another aspect of the present invention is the time of operation mode modification for the first subunit 12. Preferably, this occurs at a prespecified time - e.g., 100 μsec to 150 μsec - before the output of the transmission burst by the second subunit 14, e.g., through use of a delayed signal for the switch-on of transmitter-relevant functional blocks which is typically used to activate the antenna switch. Therefore, this modification allows to avoid in advance any disturbance of phase-related information to be received by the first subunit 12.

While in the above specific measures with respect to the low noise amplifier or the first subunit 12 have been described

with respect to Figs. 8 to 10, in the following further options to avoid a disturbing interference between different subunits in a multiple standard communication device will be explained with respect to Figs. 11 to 13.

Fig. 11 shows a schematic diagram of a tunable filter being provided between the antenna 28 and the low noise amplifier 36 of the first subunit 12 shown in Fig. 7. The tunable filter 64 shown in Fig. 11 comprises an inductor 66 and a variable capacitor 68 and may be tuned to achieve a stop band attenuation towards interference signals from the second subunit 14.

Operatively, the tunable filter 64 in front of the low noise amplifier 36 is tunable in terms of filter bandwidth and cut-off frequency under control of appropriate signals as listed above either continuously or in discrete steps in order to give smallest insertion loss or highest stop band attenuation.

E.g., operatively a notch filter may be placed in front of the low noise amplifier 36 and be tuned to the transmit frequency of the second subunit 14 such that a maximum stop band attenuation is achieved at the interfering frequency. Since the interfering signal and the received signal are close in the frequency domain, the insertion loss of the pass band of the notch filter 64 may be significant due to the limited Q factor of the filter.

However, the insertion loss of the tunable filter 64 may be minimized when the interfering signal is not present so that the center frequency of the tunable filter 64 may be detuned in order to increase the distance to the wanted reception signal. In dependence on the required attenuation one tuning state may be sufficient to, e.g., attenuate all interfering frequencies in one complete interfering band such as, e.g., GSM900 = 25 MHz.

The notch filter 64 shown in Fig. 11 may comprise suitable tuning elements such as varicaps or pin diodes 68 as variable network elements. Further, low/high bandpass filters may be designed as tunable filters 64 in a similar way as described for notch filters. Further, matching networks consisting of inductors/capacitors and used for impedance transformation may be considered as tunable filters as well.

Fig. 12 shows a schematic diagram of the switchable receiver 70 as another option to modify the operation mode of the first subunit 12 shown in Fig. 7 in dependence on the transmission mode in the second subunit 14 in accordance with the present invention.

As shown in Fig. 12, the switchable receiver comprises a first low noise amplifier 72 that is directly connected to an antenna. The first low noise amplifier 32 is adapted to receive, e.g., a positioning system localization signal and to amplify the positioning system localization signal. This localization signal may be a signal of the GPS type. Nevertheless, the present invention is not restricted to the GPS localization system and any other standard, e.g., the GLONASS or EGNOS, WAAS standard may be used as well.

As also shown in Fig. 12, the switchable receiver 70 comprises a second low noise amplifier 74 which also amplifies the positioning system localization signal. Also, at the input terminal of the second low noise amplifier 74 there is provided a filter 76 between the antenna and the second low noise amplifier 74 that is adapted to reject interfering signals.

Operatively, in the switchable receiver shown in Fig. 12 the second low noise amplifier 74 with a pre-connected tunable filter 76 is activated in case the performance of the first low noise amplifier 72 is limited due to interfering signals

from a neighbouring subunit. Therefore, in case no interfering signals prevail, no switchable filter is required for the first low noise amplifier 72 which therefore may be directly connected to the antenna. In other words, the insertion loss due to an additional filter may be avoided as long as no interfering signals prevail at the antenna and only in case a pre-filtering is necessary such an insertion loss is accepted.

Fig. 13 shows another embodiment of the present invention, i.e. the adaptation of the antenna characteristics of the antenna 28 of the first subunit 12 to enhance the blocking performance in case the transmitter of the second subunit 14 outputs transmission bursts.

As shown in Fig. 13, according to this aspect of the present invention the antenna characteristics are adapted such that the blocking performance of the first subunit 12 is enhanced by shifting the gain characteristic 76 to the right in case of an interfering signal. While such a shift to the right leads to a slight decrease of the Δ_1 for the attenuation at the maximum frequency, a much higher attenuation of Δ_2 may be achieved for out-of-band signals thus enabling a much improved blocking performance.

Therefore, according to the present invention use is made of the fact that generally antennas - e.g. GPS antennas - are designed to achieve the highest gain at the center frequency over the interesting frequency band, i.e. GPS: $S_{max} = 1575 \text{ MHz} \pm 1 \text{ MHz CA}$. Through the provision of the tunable antenna, maximum antenna gain may still be achieved if no interfering signal is present. On the other hand, in case of presence of an interfering signal out of band rejection is improved at a slight expense of antenna gain at the desired maximum frequency.

Fig. 14 shows an illustration of a GPS/GSM multiple standard communication device according to the present invention.

As shown on Fig. 14 on the left side, the transmitting subunit 30 may be the usual GSM mobile phone having the antenna 32. Further, the first subunit 12 adapted to receive GPS signals for localization may be provided as extra unit 26 which preferably is provided with a patch antenna 28 for the reception of the signals for localization.

As also shown in Fig. 14, a coupling between the GSM mobile phone and the GPS receiver unit may be achieved via an additional connector 78.

As also shown in Fig. 14, the GPS receiver unit 26 may as well be provided on top of the GSM mobile phone 30 in case the longitudinal space available for the overall multiple standard communication device is restricted. Here, e.g., the patch antenna 28 is placed in a flip in front of the mobile phone.

In the above, specific embodiments of the present invention have been described. It is to be understood for the person skilled in the art that the different features outlined and discussed above may be used not only as discussed with respect to different embodiments but also be combined in any meaningful and useful way. In particular, the different measurements may be well combined so as to achieve an even increased blocking behaviour against the different signals within a multiple standard communication device. Further, any variations and modifications, e.g., of the matching network and the operative point setting network are to be construed to be comprised by the present invention the scope of which is only defined by the dependent claims.

ABBREVIATIONS

AMPS	Advanced mobile phone service
GPS	Global Positioning System, 1575 MHz
LNA	Low noise amplifier
NF	Noise figure
G	Gain
GSM900	GSM standard, 890 MHz - 960 MHz
GSM1800	GSM standard, 1710 MHz - 1880 MHz
GSM1900	GSM standard, 1850 MHz - 1990 MHz

C l a i m s

1. A multiple communication device of the type with parallel operation, comprising:
 - a first subunit (26) at least receiving input signals at a predetermined input level;
 - a second subunit (30) at least transmitting output signals at a specific time, frequency and output level such that said output level is very large compared to said input level of said first subunit (26); wherein
 - an operation mode of said first subunit (26) is modified when said second subunit (30) is transmitting output signals.
2. The multiple standard communication device of claim 1, wherein said first subunit (26) comprises an operation mode modification unit (34) to receive at least one signal specifying time, frequency and/or output level in said second subunit for operation mode modification in said first subunit.
3. The multiple standard communication device of claim 2, wherein said operation mode modification unit (34) is adapted to modify an input characteristic of said first subunit (26).

4. The multiple standard communication device of claim 3, wherein said input characteristic of said first subunit is modified through a low noise amplifier (36) having at least two operation modes and/or a tunable filter (38) and/or a switchable receiver (70) and/or an antenna with tunable gain.
5. The multiple standard communication device of claim 4, wherein said low noise amplifier (36) has at least two operation modes and comprises:
 - a switchable bias network (40) adapted to define at least two biasing conditions of said low noise amplifier; and
 - a switchable matching network (44) adapted to optimize noise performance, gain and stability of said low noise amplifier for said at least two biasing conditions; wherein
 - a first biasing condition is related to a normal operation mode to optimize noise performance and achieve low current consumption in said first subunit (26) when no transmit bursts are generated by said second subunit (30); and
 - a second biasing condition is related to a gain adjustment mode to improve blocking performance when transmit bursts are generated by said second subunit (30).
6. The multiple standard communication device of claim 5, wherein said operation mode modification unit (34) employs at least one signal to activate said normal operation mode, said at least one signal being selected from a group comprising:

- at least a signal indicating receiver operation;
 - a signal to select frequency band and mode;
 - at least one signal containing baseband information of said received signal;
 - at least one signal being used to set a specific divider ratio; and
 - at least one positioning system S/N measurement signal.
7. The multiple standard communication device of claim 5, wherein control and/or input signals defining a transmitter signal of said second subunit (30) are employed to activate said gain adjustment mode.
8. The multiple standard communication device of claim 7, wherein
- at least one control signal is selected from a group comprising:
- a control signal indicating transmitter operation;
 - a control signal adapted to activate an antenna switch in said transmitter;
 - a control signal to select frequency band or mode;
 - a control signal to set a ramping and power level of a power amplifier; and
 - control signals that are used to set a transmitter specific divider ratio.
9. The multiple standard communication device of claim 7, wherein said at least one input signal is selected from a group comprising:

- input signals containing baseband information for transmission;
- a local oscillator input signal in a transmit/receive chain;
- transceiver transmitter signals detected by an RF-detector;
- interfering RF-signals received by an antenna (28) of said first subunit (26) and detected through a further detector.

10. The multiple standard communication device of claim 8, wherein said at least one input signal is selected from a group comprising:

- input signals containing baseband information for transmission;
- a local oscillator input signal in a transmit/receive chain;
- transceiver transmitter signals detected by an RF-detector;
- interfering RF-signals received by an antenna (28) of said first subunit (26) and detected through a further detector.

11. A multiple communication device of the type with parallel operation, comprising:

- a first subunit (26) at least receiving input signals at a predetermined input level;
- a second subunit (30) at least transmitting output signals at a specific time, frequency and output level such that said output level is very large compared to said input level of said first subunit (26); wherein

- an operation mode of said first subunit (26) is modified when said second subunit (30) is transmitting output signals;
- said first subunit (26) comprises an operation mode modification unit (34) to receive at least one signal specifying time, frequency and/or output level in said second subunit for operation mode modification in said first subunit;
- said operation mode modification unit (34) is adapted to modify an input characteristic of said first subunit (26);
- said input characteristic of said first subunit is modified through a low noise amplifier (36) having at least two operation modes and/or a tunable filter (38) and/or a switchable receiver (70) and/or an antenna with tunable gain;
- said low noise amplifier (36) has at least two operation modes and comprises:
 - a switchable bias network (40) adapted to define at least two biasing conditions of said low noise amplifier; and
 - a switchable matching network (44) is adapted to optimize noise performance, gain and stability of said low noise amplifier for said at least two biasing conditions; and wherein

- a first biasing condition is related to a normal operation mode to optimize noise performance and achieve low current consumption in said first subunit (26) when no transmit bursts are generated by said second subunit (30);
- a second biasing condition is related to a gain adjustment mode to improve blocking performance when transmit bursts are generated by said second subunit (30); and
- said switchable matching network is adapted to define said at least two biasing conditions for an amplification element (42) of said low noise amplifier.

12. The multiple standard communication device of claim 11, wherein said operation mode modification unit (34) employs at least one signal to activate said normal operation mode, said at least one signal being selected from a group comprising:
 - at least a signal indicating receiver operation;
 - a signal to select frequency band and mode;
 - at least one signal containing baseband information of said received signal;
 - at least one signal being used to set a specific divider ratio; and
 - at least one positioning system S/N measurement signal.
13. The multiple standard communication device of claim 11, wherein control and/or input signals defining a transmitter signal of said second subunit (30) are employed to activate said gain adjustment mode.

14. The multiple standard communication device of claim 13, wherein

at least one control signal is selected from a group comprising:

- a control signal indicating transmitter operation;
- a control signal adapted to activate an antenna switch in said transmitter;
- a control signal to select frequency band or mode;
- a control signal to set a ramping and power level of a power amplifier; and
- control signals that are used to set a transmitter specific divider ratio.

15. The multiple standard communication device of claim 13, wherein said at least one input signal is selected from a group comprising:

- input signals containing baseband information for transmission;
- a local oscillator input signal in a transmit/receive chain;
- transceiver transmitter signals detected by an RF-detector;
- interfering RF-signals received by an antenna (28) of said first subunit (26) and detected through a further detector.

16. A multiple communication device of the type with parallel operation, comprising:

- a first subunit (26) at least receiving input signals at a predetermined input level;

- a second subunit (30) at least transmitting output signals at a specific time, frequency and output level such that said output level is very large compared to said input level of said first subunit (26); wherein
- an operation mode of said first subunit (26) is modified when said second subunit (30) is transmitting output signals; wherein
- said first subunit (26) comprises an operation mode modification unit (34) to receive at least one signal specifying time, frequency and/or output level in said second subunit for operation mode modification in said first subunit;
- said operation mode modification unit (34) is adapted to modify an input characteristic of said first subunit (26);
- said input characteristic of said first subunit is modified through a low noise amplifier (36) having at least two operation modes and/or a tunable filter (38) and/or a switchable receiver (70) and/or an antenna with tunable gain; and
- said switchable matching network is adapted to define said at least two biasing conditions for an amplification element (42) of said low noise amplifier or
- said tunable filter (64) is adapted to block said interference signal only when transmit bursts are generated by said second subunit (30).

17. A multiple communication device of the type with parallel operation, comprising:

- a first subunit (26) at least receiving input signals at a predetermined input level;
- a second subunit (30) at least transmitting output signals at a specific time, frequency and output level such that said output level is very large compared to said input level of said first subunit (26); wherein
- an operation mode of said first subunit (26) is modified when said second subunit (30) is transmitting output signals; wherein
- said first subunit (26) comprises an operation mode modification unit (34) to receive at least one signal specifying time, frequency and/or output level in said second subunit for operation mode modification in said first subunit;
- said operation mode modification unit (34) is adapted to modify an input characteristic of said first subunit (26);
- said input characteristic of said first subunit is modified through a low noise amplifier (36) having at least two operation modes and/or a tunable filter (38) and/or a switchable receiver (70) and/or an antenna with tunable gain; and
- said switchable receiver comprises:

- a first low noise amplifier (72) being directly connected to an antenna adapted to receive a signal for localization and to amplify the position system localization signal;
- a second low noise amplifier (74) adapted to amplify the signal for localization; and
- a filter (76) connected between said antenna and said second low noise amplifier and adapted to reject blocking signals; and wherein
- in case a performance of said low noise amplifier (72) is limited due to an interfering signal said second low noise amplifier (74) with said filter (76) connected thereto is activated.

18. The multiple communication device of claim 17, wherein said low noise amplifier has at least two operation modes and comprises:

- a switchable bias network adapted to define at least two biasing conditions of said low noise amplifier; and
- a switchable matching network is adapted to optimize noise performance, gain and stability of said low noise amplifier for said at least two biasing conditions; wherein

- a first biasing condition is related to a normal operation mode to optimize noise performance and achieve low current consumption in said first subunit (26) when no transmit bursts are generated by said second subunit (30); and
 - a second biasing condition is related to a gain adjustment mode to improve blocking performance when transmit bursts are generated by said second subunit (30).
19. The multiple standard communication device of claim 18, wherein said operation mode modification unit (34) employs at least one signal to activate said normal operation mode, said at least one signal being selected from a group comprising:
- at least a signal indicating receiver operation;
 - a signal to select frequency band and mode;
 - at least one signal containing baseband information of said received signal;
 - at least one signal being used to set a specific divider ratio; and
 - at least one positioning system S/N measurement signal.
20. The multiple standard communication device of claim 18, wherein control and/or input signals defining a transmitter signal of said second subunit (30) are employed to activate said gain adjustment mode.
21. The multiple standard communication device of claim 18, wherein
- at least one control signal is selected from a group comprising:

- a control signal indicating transmitter operation;
- a control signal adapted to activate an antenna switch in said transmitter;
- a control signal to select frequency band or mode;
- a control signal to set a ramping and power level of a power amplifier; and
- control signals that are used to set a transmitter specific divider ratio.

22. The multiple standard communication device of claim 20, wherein said at least one input signal is selected from a group comprising:

- input signals containing baseband information for transmission;
- a local oscillator input signal in a transmit/receive chain;
- transceiver transmitter signals detected by an RF-detector;
- interfering RF-signals received by an antenna (28) of said first subunit (26) and detected through a further detector.

23. The multiple standard communication device of claim 21 wherein said at least one input signal is selected from a group comprising:

- input signals containing baseband information for transmission;
- a local oscillator input signal in a transmit/receive chain;
- transceiver transmitter signals detected by an RF-detector;
- interfering RF-signals received by an antenna (28) of said first subunit (26) and detected through a further detector.

24. A multiple communication device of the type with parallel operation, comprising:

- a first subunit (26) at least receiving input signals at a predetermined input level;
- a second subunit (30) at least transmitting output signals at a specific time, frequency and output level such that said output level is very large compared to said input level of said first subunit (26); wherein
- an operation mode of said first subunit (26) is modified when said second subunit (30) is transmitting output signals; wherein
- said first subunit (26) comprises an operation mode modification unit (34) to receive at least one signal specifying time, frequency and/or output level in said second subunit for operation mode modification in said first subunit;
- said operation mode modification unit (34) is adapted to modify an input characteristic of said first subunit (26);
- said input characteristic of said first subunit is modified through a low noise amplifier (36) having at least two operation modes and/or a tunable filter (38) and/or a switchable receiver (70) and/or an antenna with tunable gain; and

- antenna characteristics are adapted to enhance blocking performance of said first subunit (26) for shifting said frequency with maximum gain in case of presence of a blocking signal so as to provide additional attenuation for out of band signals.
25. A multiple communication device of the type with parallel operation, comprising:
- a first subunit (26) at least receiving input signals at a predetermined input level;
 - a second subunit (30) at least transmitting output signals at a specific time, frequency and output level such that said output level is very large compared to said input level of said first subunit (26); wherein
 - an operation mode of said first subunit (26) is modified when said second subunit (30) is transmitting output signals; wherein
 - said first subunit is a global positioning system (GPS) receiver and said second subunit outputs two transmission signals according to a dual band mobile communication standard GSM 900/GSM 1900.
26. A method of operating a multiple standard communication device of the type with parallel operation, comprising a first subunit (26) at least receiving input signals at a predetermined input level and a second subunit (30) at least transmitting output signals at a specific time, frequency and output level such that the output level of the second subunit (30) is very large compared to the input level of the first subunit (26), comprising the step:

- modifying an operation mode of the first subunit (26) when the second subunit (30) is transmitting output signals.
27. The method of claim 26, wherein said operation mode of the first subunit (26) is modified in compliance with at least time, frequency and/or output level in the transmitting second subunit (30).
28. The method of claim 27, wherein said operation mode is modified by changing an input characteristic of the first subunit (26).
29. The method of claim 28, wherein said input characteristic of the first subunit (26) is modified via a low noise amplifier (36) having at least two operation modes and/or a tunable filter (64) and/or a switchable receiver (70) and/or a tunable antenna gain.
30. The method of claim 29, wherein operation mode modification is executed using at least one signal to activate a normal operation mode in the second subunit (30).
31. The method of claim 29, wherein control and/or input signals defining a transmitter signal in the second subunit (30) are employed to initiate the operation mode modification in the first subunit (26).

32. A computer program product directly loadable into an internal memory of a digital computer, comprising software code portions for performing a method of operating a multiple standard communication device of the type with parallel operation, comprising a first subunit (26) at least receiving input signals at a predetermined input level and a second subunit (30) at least transmitting output signals at a specific time, frequency and output level such that said output level of said second subunit (30) is very large compared to said input level of said first subunit (26), with a step modifying an operation mode of said first subunit (26) when said second subunit (30) is transmitting output signals when the computer program product is run on a computer.
33. The computer program product of claim 32 which is stored on a computer storage medium.

A b s t r a c t

To maintain a receiving sub-system in a multiple standard communication device fully operational according to all operation modes of a second transmitting sub-system of the multiple communication device it is proposed that a multiple standard communication device of the type with parallel operation comprises a first subunit at least receiving input signals at a predetermined input level, and a second subunit at least transmitting output signals at a specific time, frequency and output level such that the output level is very large compared to the input level of the first subunit. According to the present invention the operation mode of the first subunit is modified when the second subunit is transmitting output signals.

(Fig. 7)

FIG.1

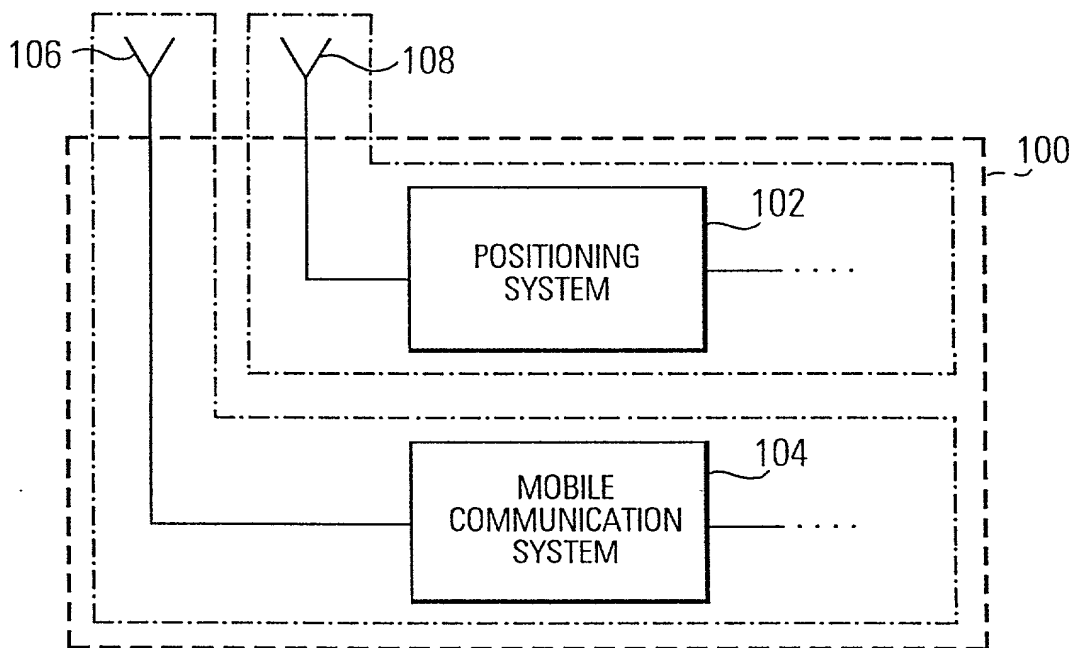


FIG.2

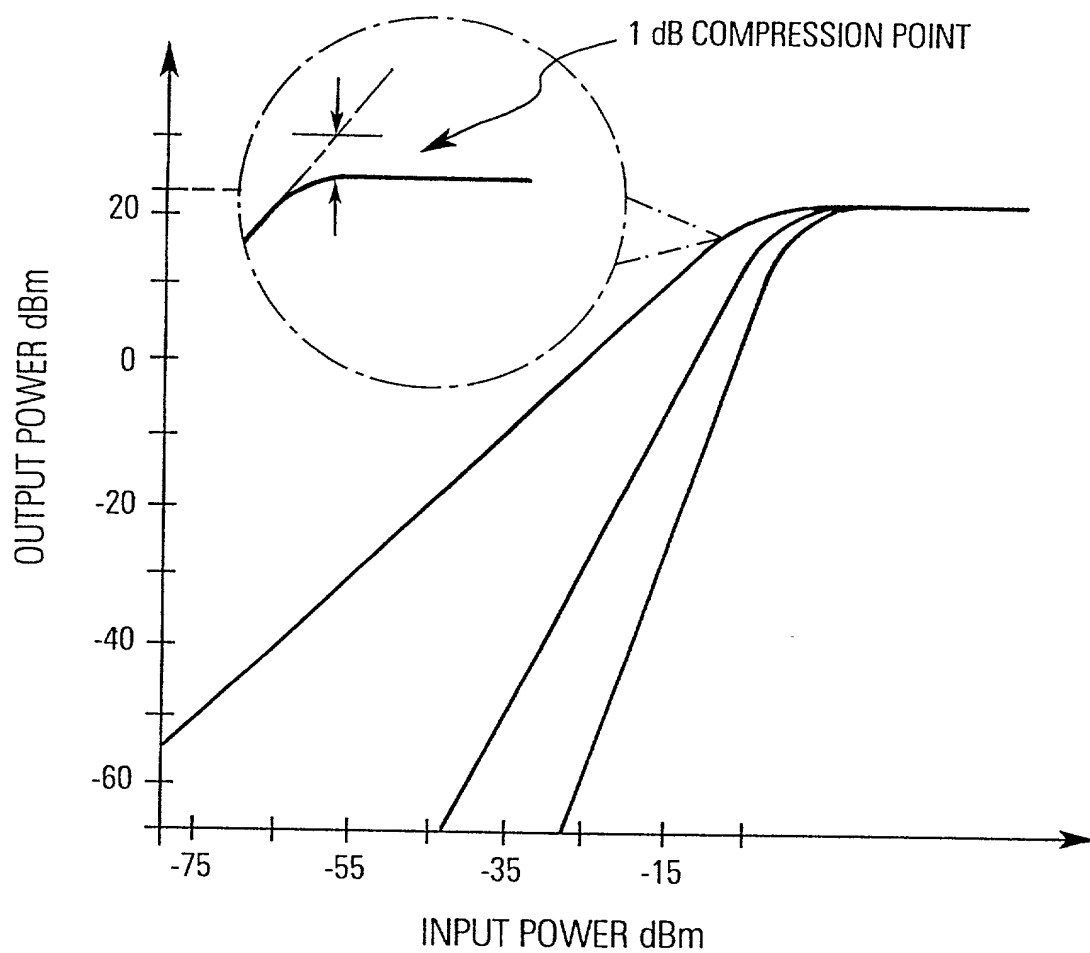


FIG.3

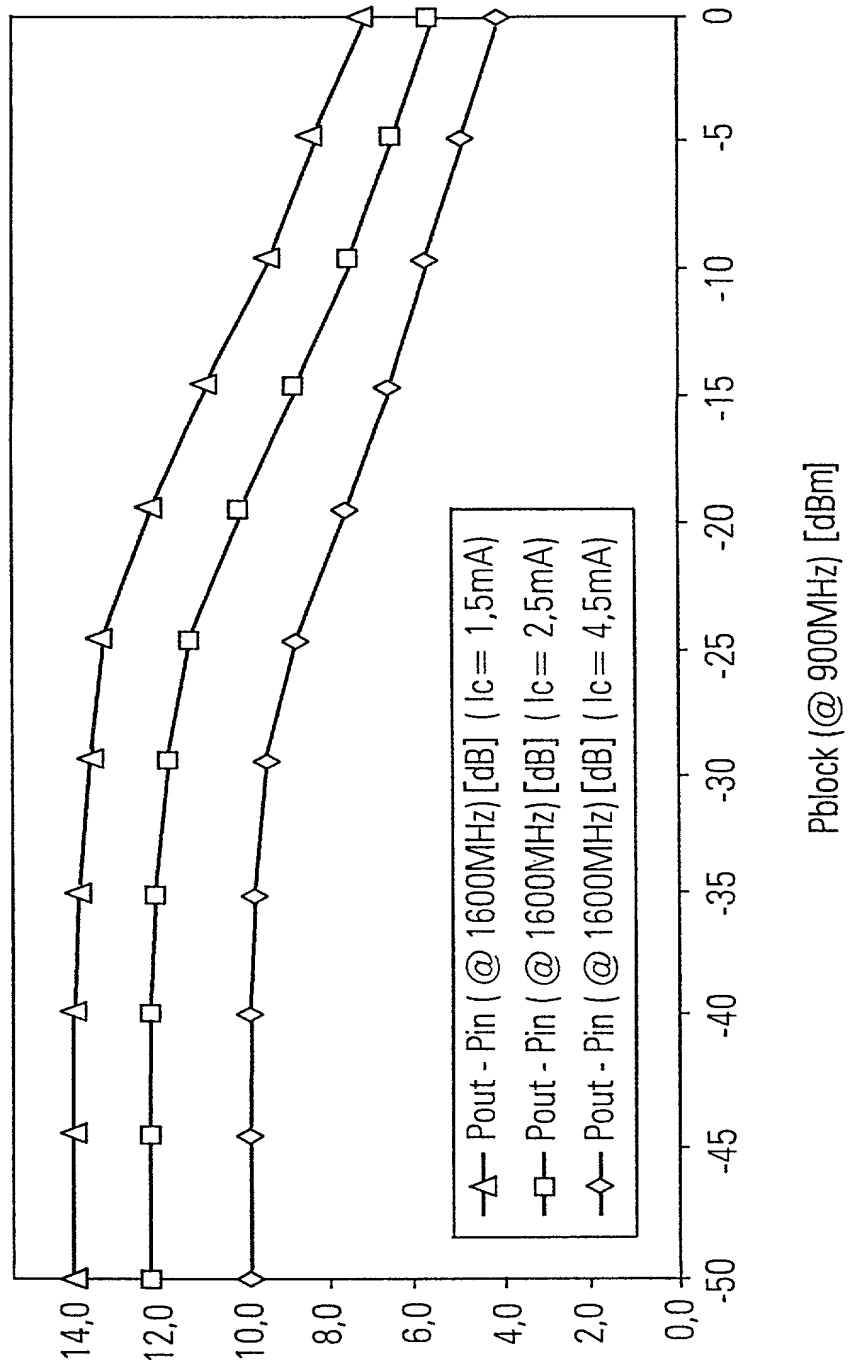


FIG.4

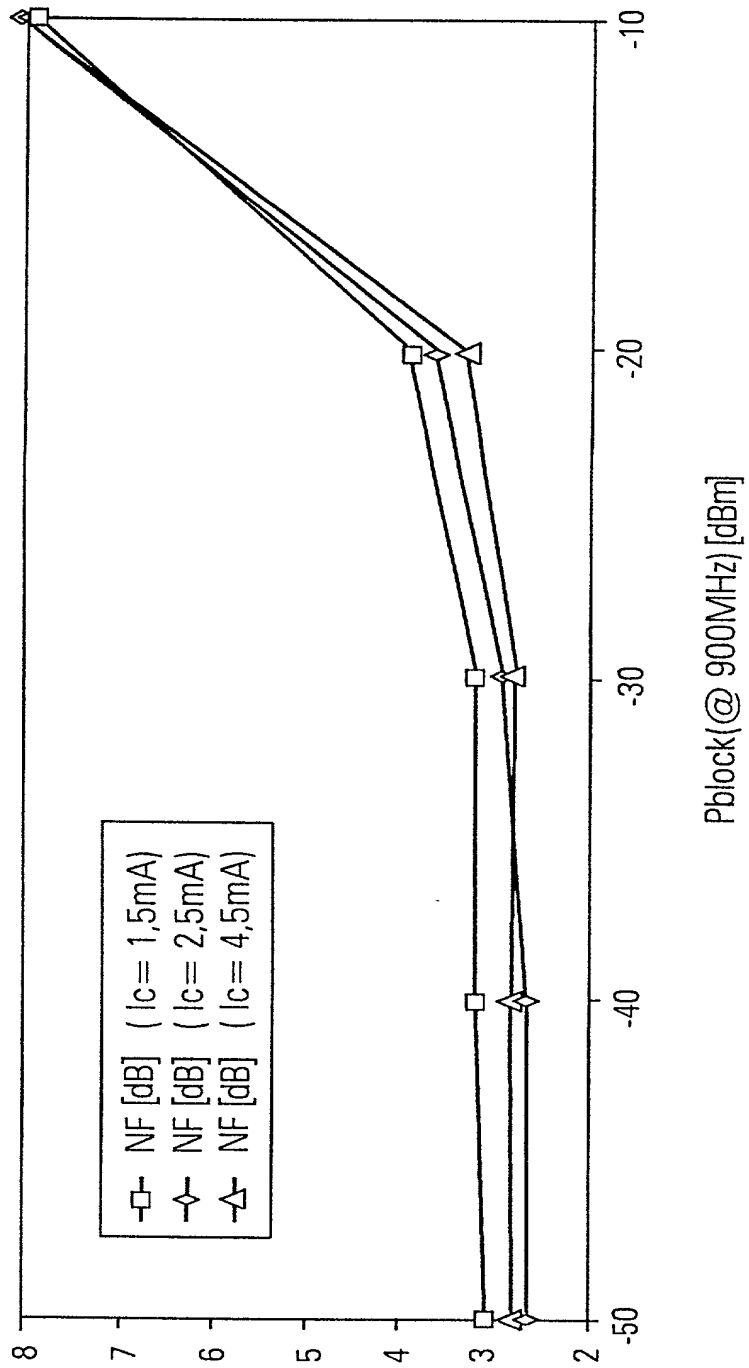


FIG.5

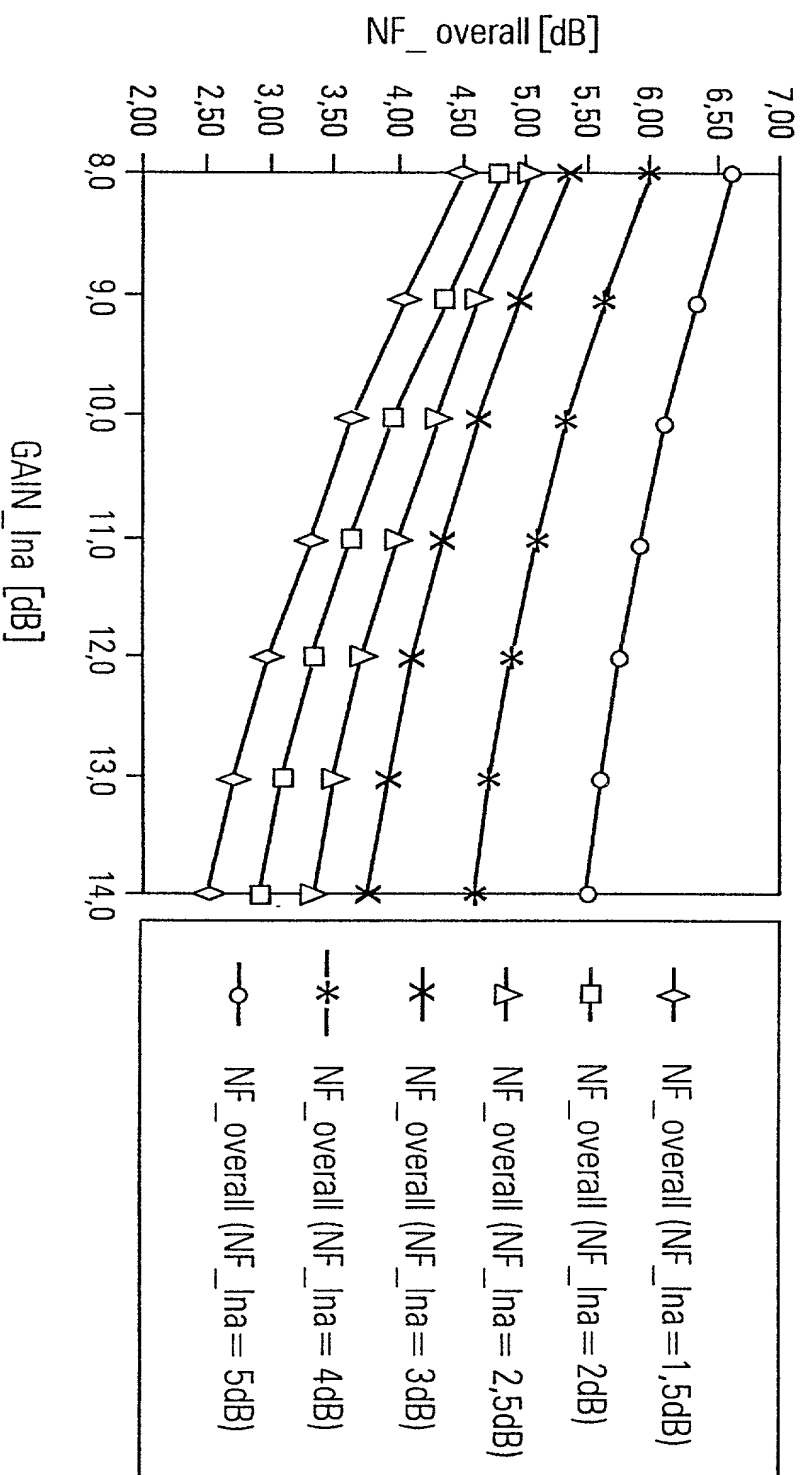


FIG.6

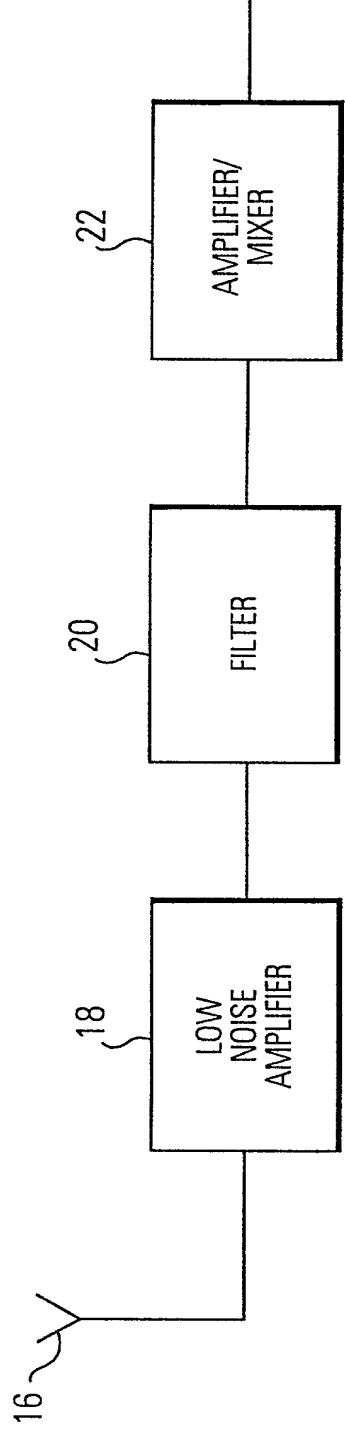


FIG. 7

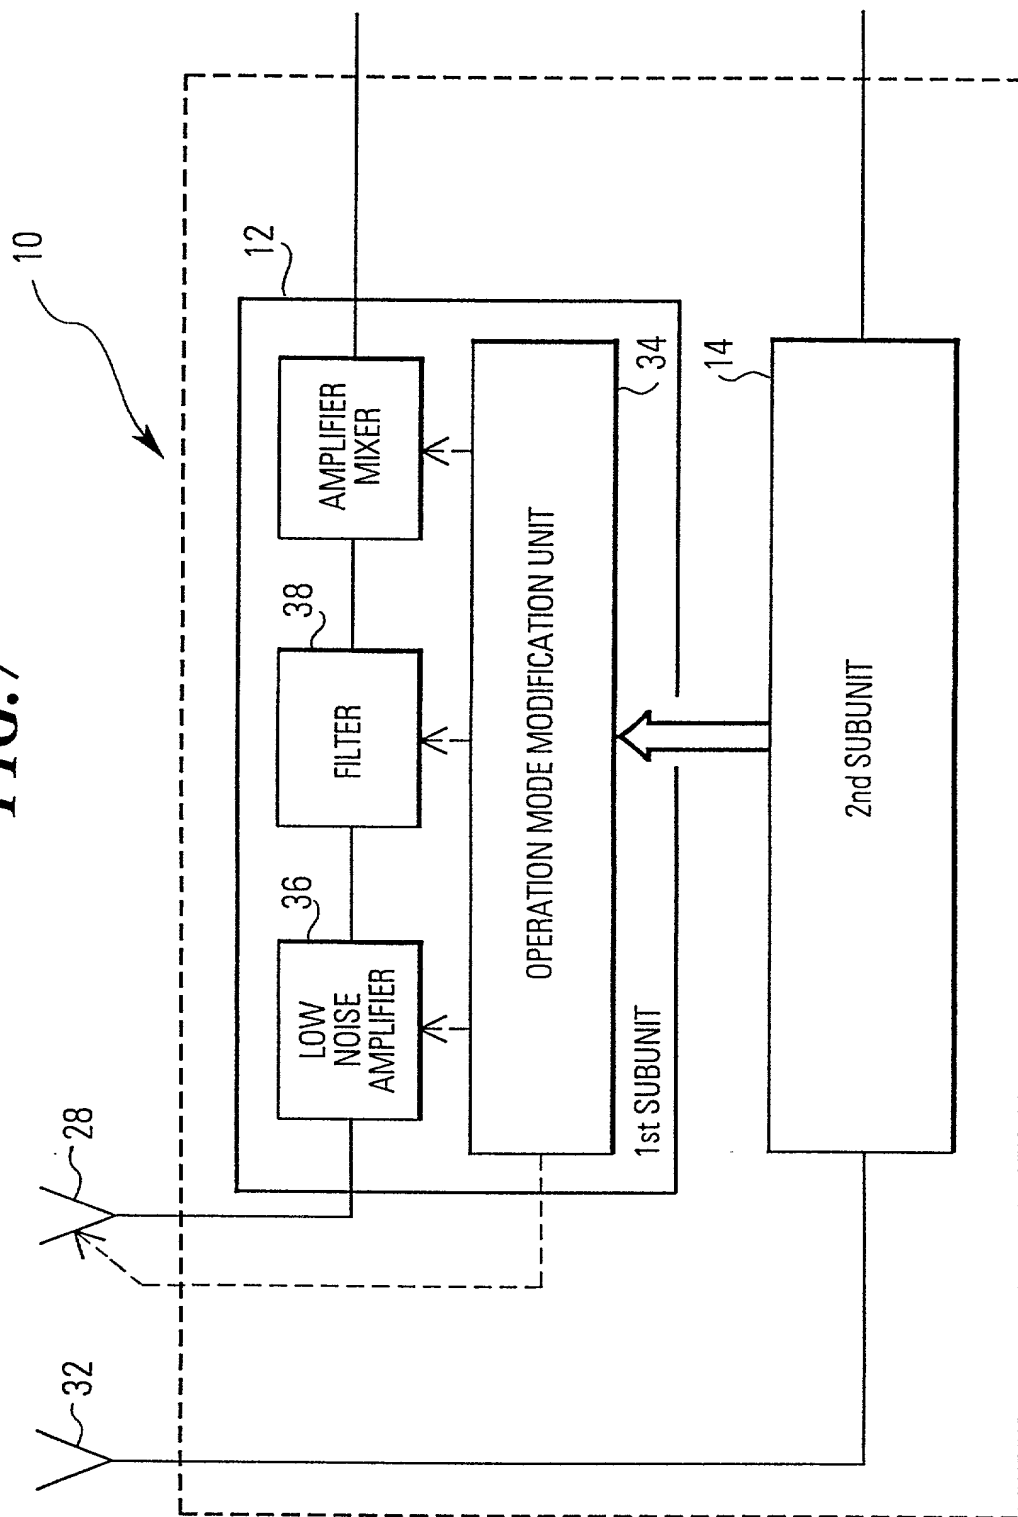


FIG. 8

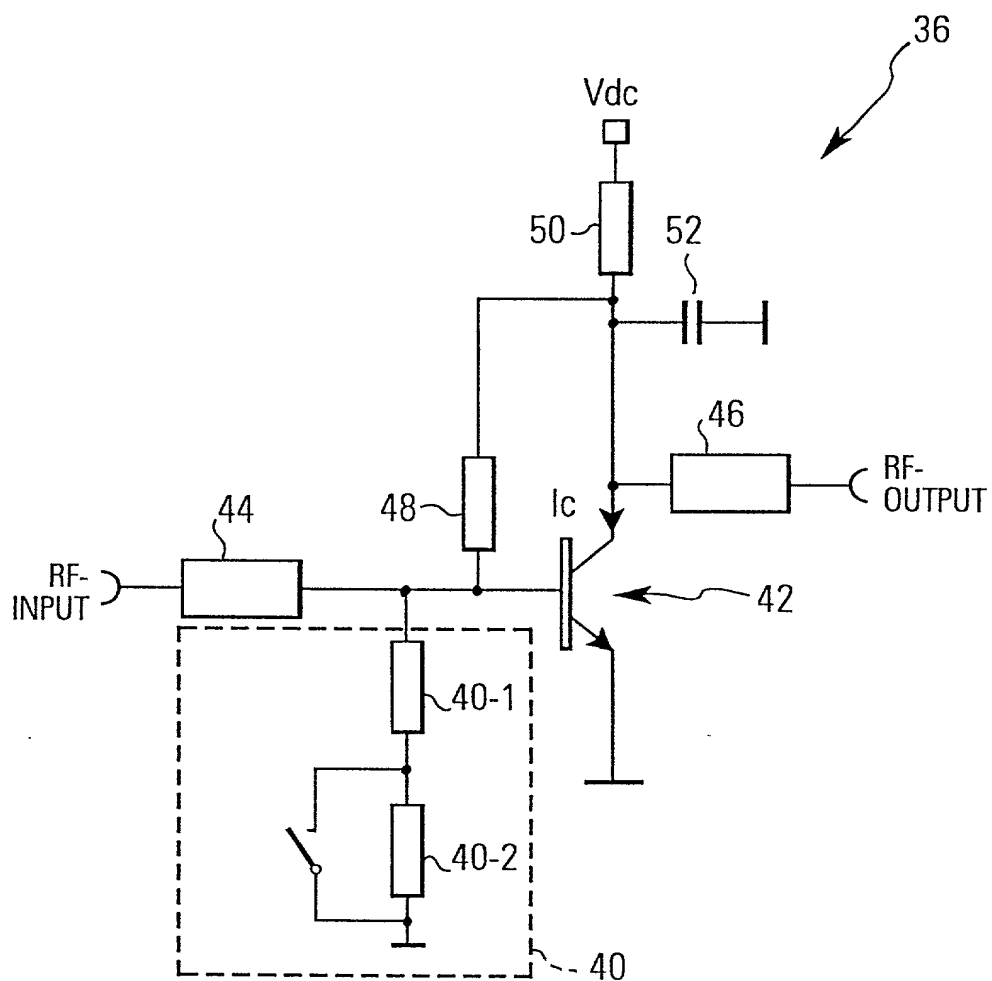


FIG. 9

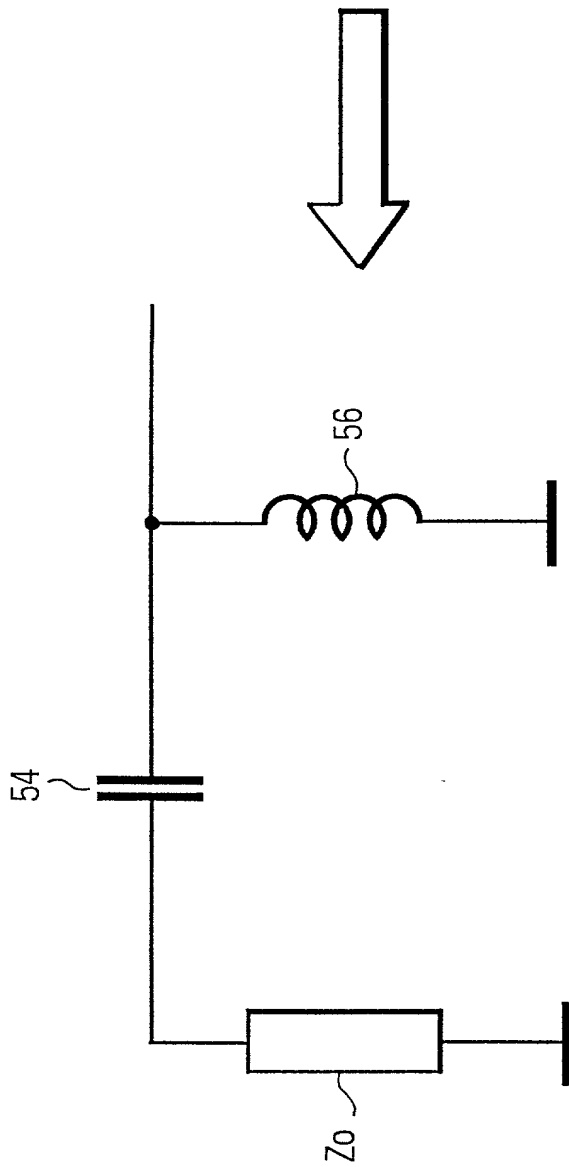


FIG.10

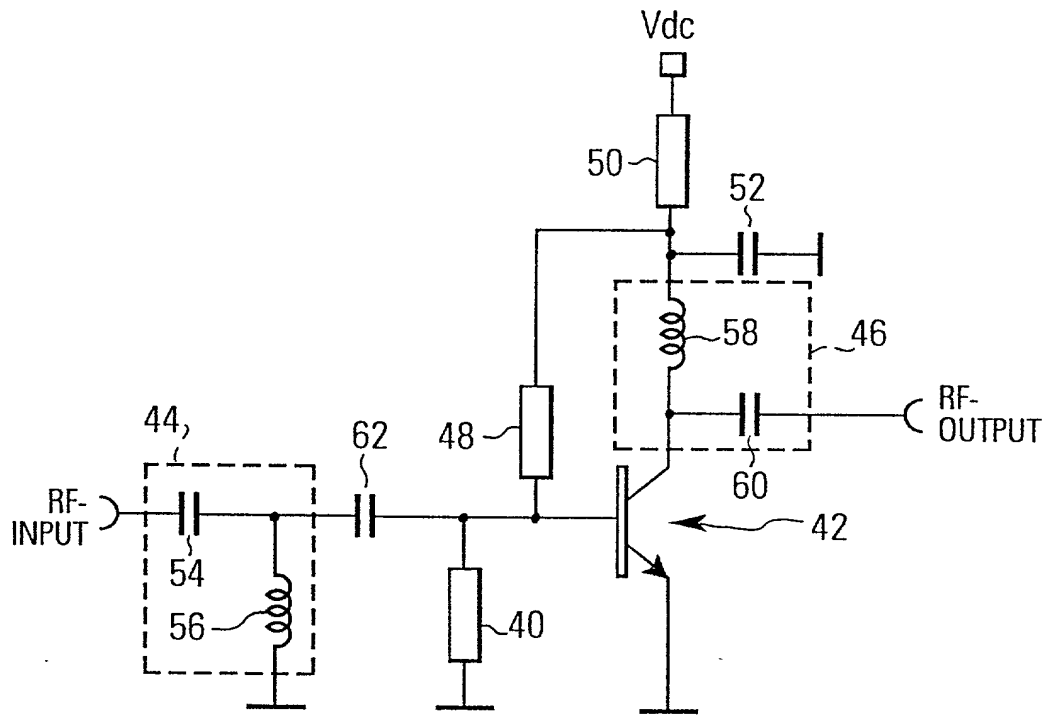


FIG.11

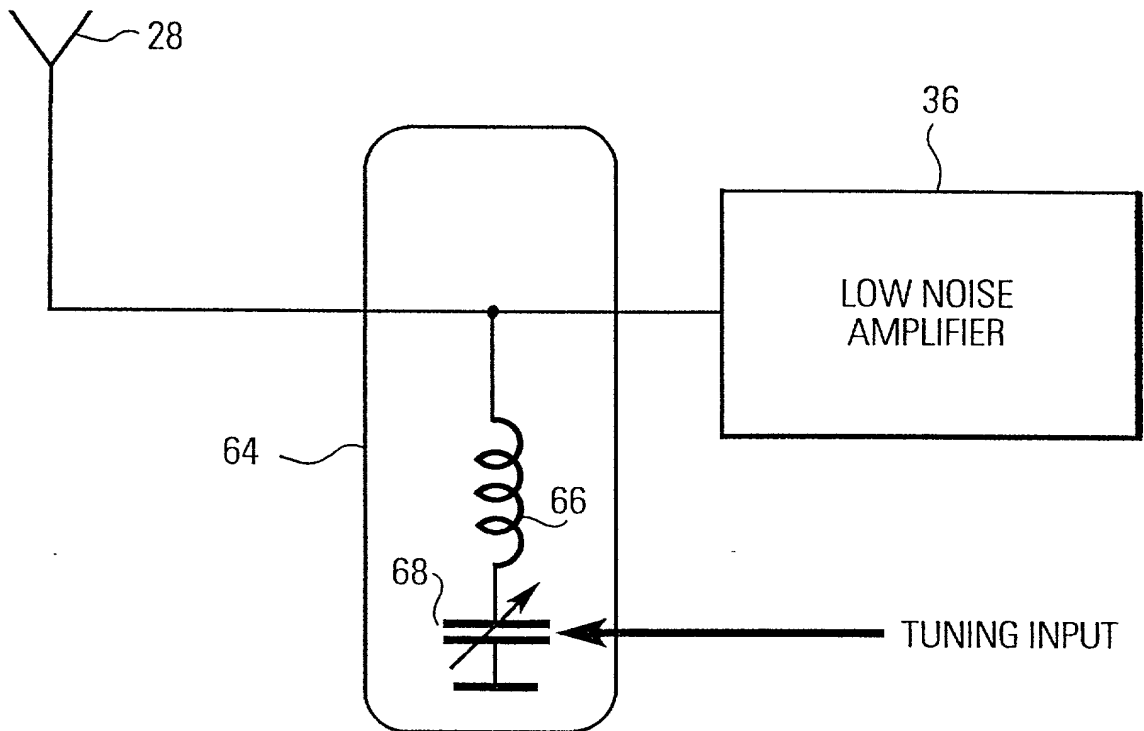


FIG.12

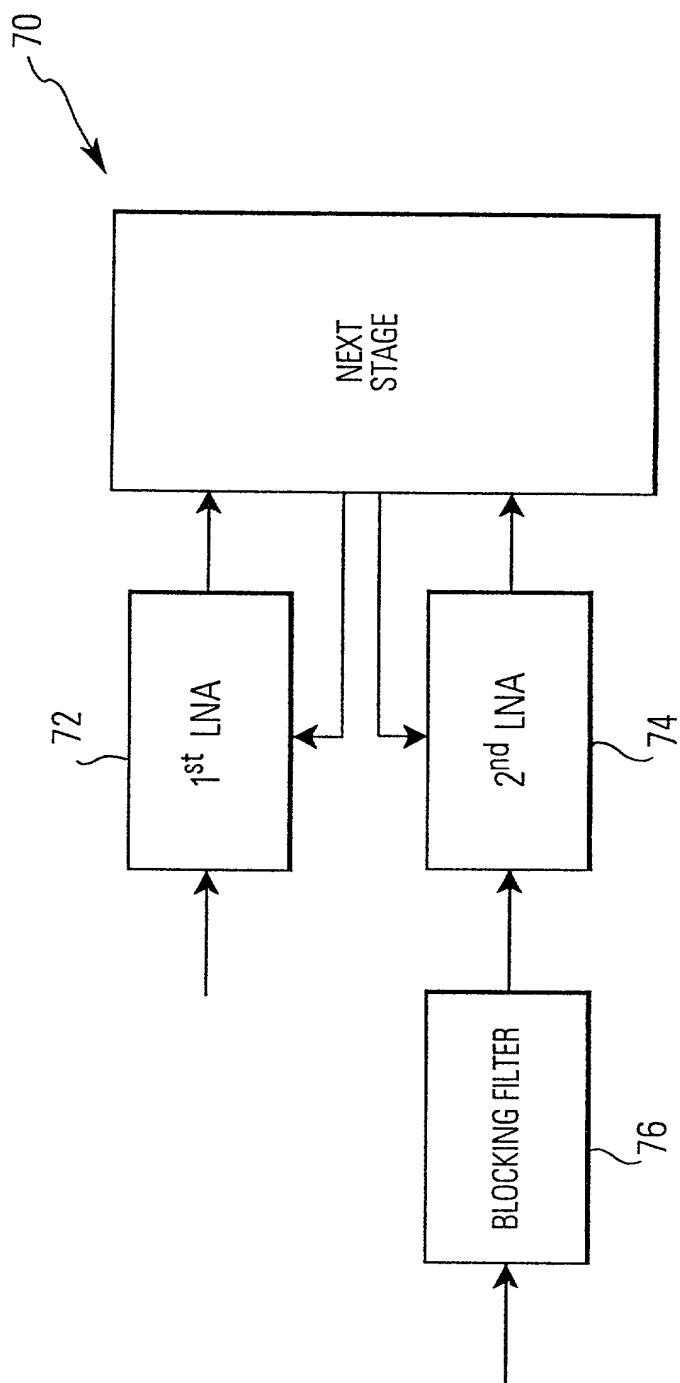


FIG.13


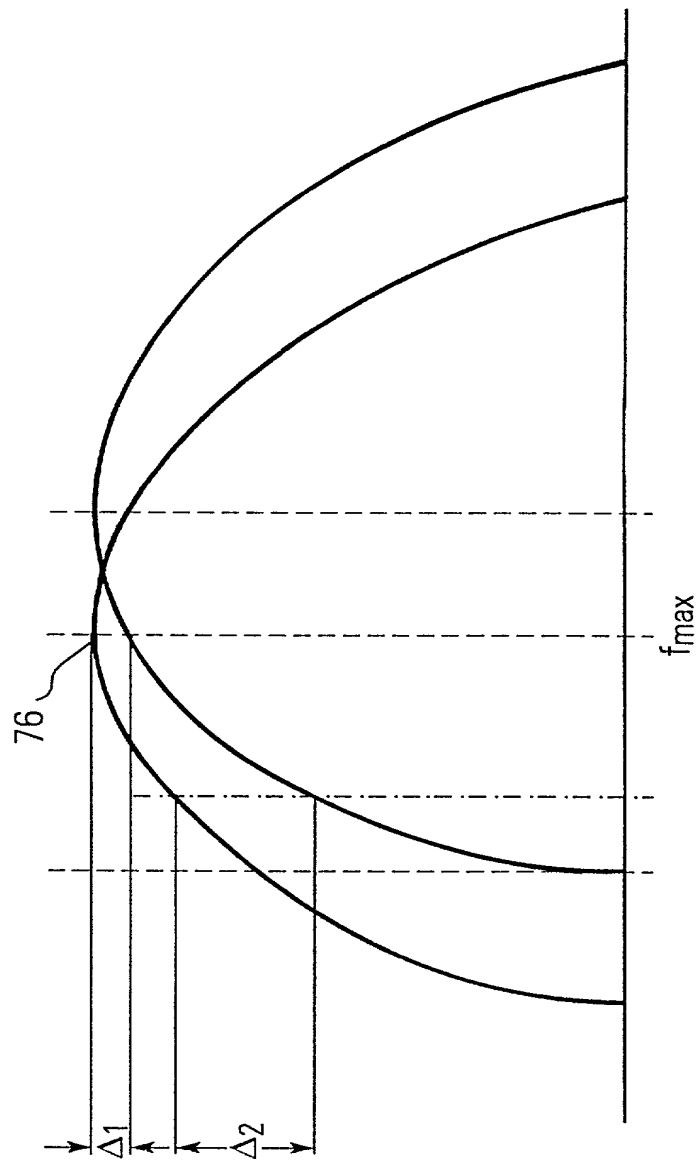


FIG.14

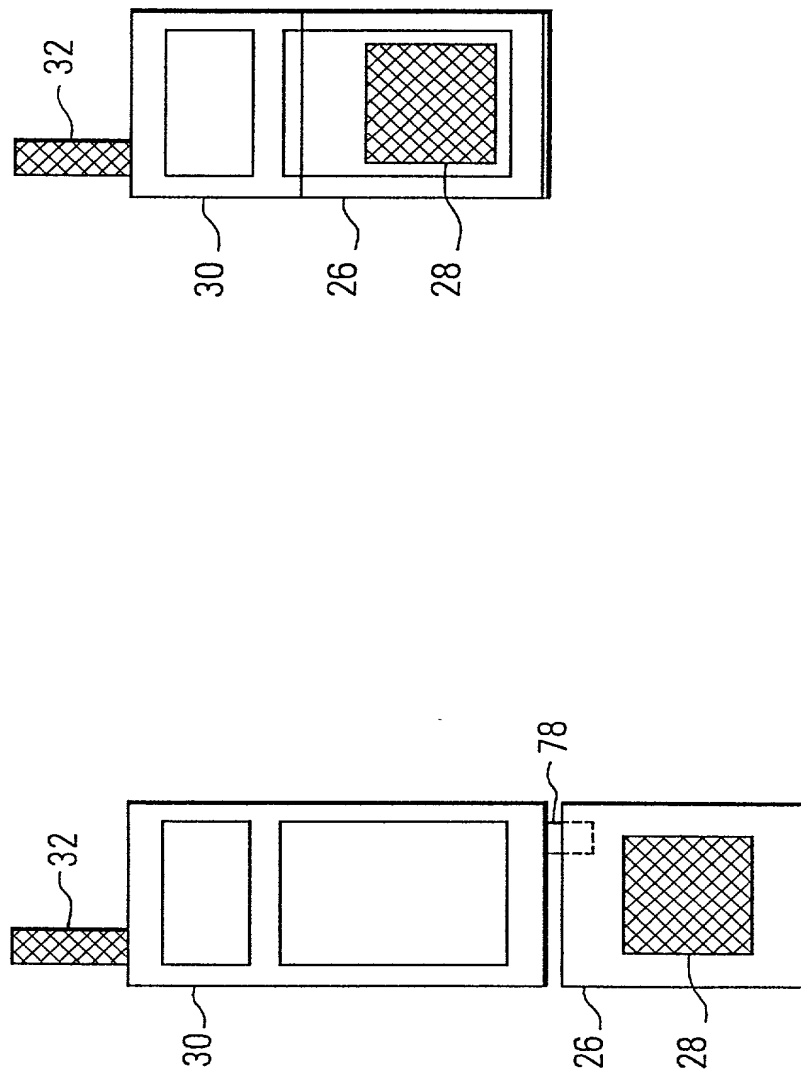

83484 a/ea

**RULES 63 AND 67 (37 C.F.R. 1.63 and 1.67)
DECLARATION AND POWER OF ATTORNEY**

FOR UTILITY/DESIGN/CIP/PCT NATIONAL APPLICATIONS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **PARALLEL OPERATION OF DEVICES USING MULTIPLE COMMUNICATION STANDARDS**, the specification of which: (mark only one)

- | | | |
|---------------|-----|--|
| <u> X </u> | (a) | is attached hereto. |
| <u> </u> | (b) | was filed on <u> </u> as Application Serial No. <u> </u> and was amended on <u> </u> (if applicable) |
| <u> </u> | (c) | was filed as PCT International Application No. PCT/ <u> </u> on <u> </u> and was amended on <u> </u> (if applicable). |
| <u> </u> | (d) | was filed on <u> </u> as Application Serial No. <u> </u> and was issued a Notice of Allowance on <u> </u> . |
| <u> </u> | (e) | was filed on <u> </u> and bearing attorney docket number <u>43605-00019USPX</u> |

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above or as allowed as indicated above.

I acknowledge the duty to disclose all information known to me to be material to the patentability of this application as defined in 37 CFR § 1.56. If this is a continuation-in-part (CIP) application, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability of the application as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

I hereby claim foreign priority benefits under 35 U.S.C. § 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the subject matter claimed in this application and having a filing date (1) before that of the application on which my priority is claimed or, (2) if no priority is claimed, before the filing date of this application:

PRIOR FOREIGN PATENTS

<u>Number</u>	<u>Country</u>	<u>Month/Day/Year Filed</u>	<u>Date first laid-</u>	<u>Date</u>	<u>Priority Claimed</u>	
			<u>open or Published</u>	<u>patented or Granted</u>	<u>Yes</u>	<u>No</u>
99 116 576.2	EPO	August 24, 1999				XX

I hereby claim the benefit under 35 U.S.C. § 120/365 of any United States application(s) listed below and PCT international applications listed above or below:

PRIOR U.S. OR PCT APPLICATIONS

<u>Application No. (series code/serial no.)</u>	<u>Month/Day/Year Filed</u>	<u>Status (pending, abandoned, patented)</u>
---	-----------------------------	--

I hereby appoint:

TIMOTHY G. ACKERMANN, Reg. No. 44,493	RUSSELL J. GENET, Reg. No. 42,571	DANIEL G. NGUYEN, Reg. No. 42,933
THOMAS E. ANDERSON, Reg. No. 37,063	J. KEVIN GRAY, Reg. No. 37,141	SPENCER C. PATTERSON, Reg. No. 43,849
BENJAMIN J. BAI, Reg. No. 43,481	STEVEN R. GREENFIELD, Reg. No. 38,166	RUSSELL N. RIPPAMONTI, Reg. No. 39,521
MICHAEL J. BLANKSTEIN, Reg. No. 37,097	J. PAT HEPTIG, Reg. No. 40,643	STEPHEN G. RUDISILL, Reg. No. 20,087
MARY JO BOLDINGH, Reg. No. 34,713	SHARON A. ISRAEL, Reg. No. 41,867	HOLLY L. RUDNICK, Reg. No. 43,065
MARGARET A. BOULWARE, Reg. No. 28,708	JOHN R. KIRK JR., Reg. No. 24,477	J. L. JENNIE SALAZAR, Reg. No. 45,065
ARTHUR J. BRADY, Reg. No. 42,356	PAUL R. KITCH, Reg. No. 38,206	KEITH W. SAUNDERS, Reg. No. 41,462
MATTHEW O. BRADY, Reg. No. 44,554	TIMOTHY M. KOWALSKI, Reg. No. 44,192	JERRY R. SELINGER, Reg. No. 26,582
DANIEL J. BURNHAM, Reg. No. 39,618	HSIN-WEI LUANG, Reg. No. 44,213	GARY B. SOLOMON, Reg. No. 44,347
THOMAS L. CANTRELL, Reg. No. 20,849	JAMES F. LEA III, Reg. No. 41,143	WAYNE O. STACY, Reg. No. 45,125
RONALD B. COOLLEY, Reg. No. 27,187	ROBERT W. MASON, Reg. No. 42,848	STEVE Z. SZCZEPANSKI, Reg. No. 27,957
THOMAS L. CRISMAN, Reg. No. 24,846	ROGER L. MAXWELL, Reg. No. 31,855	ANDRE M. SZUWALSKI, Reg. No. 35,701
STUART D. DWORK, Reg. No. 31,103	ROBERT A. McFALL, Reg. No. 28,968	ALAN R. THIELE, Reg. No. 30,694
WILLIAM F. ESSER, Reg. No. 38,033	STEVEN T. McDONALD, Reg. No. 45,999	TAMSEN VALOIR, Reg. No. 41,417
ROGER J. FRENCH, Reg. No. 27,786	LISA H. MEYERHOFF, Reg. No. 36,869	RAYMOND VAN DYKE, Reg. No. 34,746
JANET M. GARETTO, Reg. No. 42,568	STANLEY R. MOORE, Reg. No. 26,958	BRIAN D. WALKER, Reg. No. 37,751
JOHN C. GATZ, Reg. No. 41,774	RICHARD J. MOURA, Reg. No. 34,883	GERALD T. WELCH, Reg. No. 30,332
	MARK V. MULLER, Reg. No. 37,509	HAROLD N. WELLS, Reg. No. 26,044
	P. WESTON MUSSELMAN JR, Reg. No. 31,644	WILLIAM D. WIESE, Reg. No. 45,217

all of the firm of **JENKENS & GILCHRIST, a Professional Corporation**, 1445 Ross Avenue, Suite 3200, Dallas, Texas 75202-2799, as my attorneys and/or agents, with full power of substitution and revocation, to prosecute this application, provisionals thereof, continuations, continuations-in-part, divisionals, appeals, reissues, substitutions, and extensions thereof and to transact all business in the United States Patent and Trademark Office connected therewith, to appoint any individuals under an associate power of attorney and to file and prosecute any international patent application filed thereon before any international authorities, and I hereby authorize them to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/organization who/which first sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct them in writing to the contrary.

006641 00400

Please address all correspondence and direct all telephone calls to:

Richard J. Moura, Esq.
Jenkins & Gilchrist, P.C.
1445 Ross Avenue, Suite 3200
Dallas, Texas 75202-2799
214/855-4500
214/855-4300 (fax)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAMED INVENTOR(S)

1	Harald THOMAS	<i>Harald Thomas</i>	8.8.7000
	Full Name	Inventor's Signature	Date
	Franz-Lizst-Str. 10 D-90453 Nürnberg, DE		
	Residence (city, state, country)	Germany Citizenship	
Franz-Lizst-Str. 10 D-90453 Nürnberg, DE Post Office Address (include zip code)			

(FOR ADDITIONAL INVENTORS, check here X and add additional sheet for inventor information regarding signature, name, date, citizenship, residence and address)

3	Dr. Roman GLÖCKLER	<i>Roman Glöckler</i>	8 Aug 00
	Full Name	Inventor's Signature	Date
	Birkenstr. 17 D-91207 Lauf, DE		
	Residence (city, state, country)		Germany Citizenship
Birkenstr. 17 D-91207 Lauf, DE Post Office Address (include zip code)			

09537543 094400

